

**Premium** Hefmagneet / **Premium** Magnetic Lifter **Eigenschappen**

- » Geschikt voor het hijsen en hanteren van staalplaten, -blokken of -buizen.
- » Magnetisch veld wordt geproduceerd door het draaien van de hendel.

Premium eigenschappen:


- » Stalen blok beschermt de hendel tegen schokken.
- » Meer stabiliteit door het vaste ophangoog.
- » Veilige hantering door ontgrendeling op het huis (in plaats van aan de hendel).
- » Voldoet aan de Machinerichtlijn 2006/42/EG. Geleverd met testcertificaat, CE-conformiteitsverklaring en gebruiksaanwijzing.

 **Features**

- » Suitable for lifting and handling steel plates, -blocks or -pipes.
- » Magnetic field is produced by turning the handle.

Premium features:

- » Steel block protects the lever from shocks.
- » More stability due to fixed suspension eye.
- » Safe handling by unlocking on the housing (instead of at the lever).
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

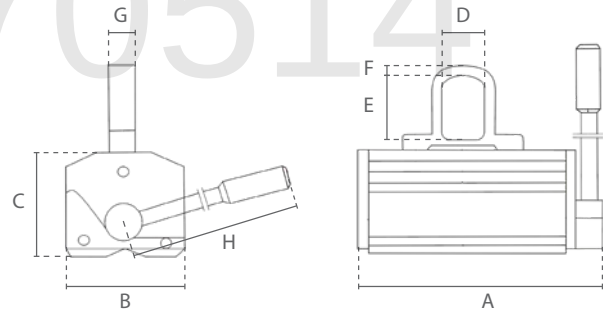

Specificaties / Specifications				
Artikelnummer Article code	Capaciteit Capacity		Min. plaatdikte Min. plate thickness	Netto gewicht Net weight
	Vlak materiaal / Flat material	Rond materiaal / Round material (50%)	mm	kg
DC.0.QML.0100	0.1	0.05	15	4
DC.0.QML.0300	0.3	0.15	20	11
DC.0.QML.0600	0.6	0.3	30	21
DC.0.QML.1000	1	0.5	40	42
DC.0.QML.2000	2	1	60	105

Specificaties / Specifications	
Bedrijfstemperatuur / Operating temperature	-40°C - +80°C
Veiligheids factor / Safety factor	3.5
Magneet type / Magnet type	Permanente NdFeB magneet / Permanent NdFeB magnet

Afmetingen / Dimensions								
Capaciteit / Capacity ton	A	B	C	D	E	F	G	H
0.1	137	62	66	21	32	8	15	120
0.3	199	90	95	38	50	11	22	175
0.6	263	115	107	42	58	13	25	225
1	303	150	147	50	64	18	29	266
2	417	190	195	56	76	21	37	415



QML vs DML

Premium

Meer stabiliteit door vast ophangoog. /
More stability due to fixed suspension eye.

Beweegbaar ophangoog. /
Movable suspension eye.



DC.0.QML



SG.0.DML

Stalen blok beschermt de hendel tegen schokken. /
Steel block protects the lever from shocks.

Hendel onbeschermd. /
Lever unprotected.



Ontgrendeling aan de behuizing, terugslag hendel beter controleerbaar. /
Safe handling due to unlocking at the housing.



Ontgrendeling aan de hendel. /
Unlocking at the lever.

Specificaties / Specifications				
	DC.0.QML	SG.0.DML	DC.0.QML	SG.0.DML
	Capaciteit rond materiaal / Capacity round material		Min. plaatdikte / Min. plate thickness	
	kg		mm	
100 kg	50	50	15	15
300 kg	150	150	20	25
600 kg	300	300	30	30
1 ton	500	500	40	40
2 ton	1000	1000	60	55